CROMO 35 AR JUNIOR MICRO

TRATTORE ARTICOLATO, A QUATTRO RUOTE MOTRICI UGUALI, SUPER-STRETTO: CON PNEUMATICI 5.00-15 INFATTI LA LARGHEZZA FUORI TUTTO È DI SOLI 77 CM!

Un alleato imprescindibile nelle lavorazioni di micro-filari e di vigne strette, nelle coltivazioni di ortaggi in serra e adatto ai vivai adibiti alla coltivazione degli alberi di Natale tipici del Nord Europa.

Dotato di motore 3 cilindri Kubota da 25 cv e della medesima trasmissione 8 AV + 4 RM ad innesti agevolati che equipaggia la gamma 35, il CROMO 35 AR in versione JUNIOR MICRO è caratterizzato, oltre da dimensioni iper-compatte uniche nel segmento dei trattori specializzati, anche da un allestimento essenziale ma ampiamente configurabile grazie ad una vasta scelta di optional:

sollevatore posteriore a due cilindri, prese idrauliche posteriori, volante di guida regolabile in altezza, fari di lavoro anteriori.

Un trattore iper-specializzato semplice e multifunzionale per agricoltori esigenti che cercano agilità di manovra in spazi ristretti, performance e affidabilità.

ARTICULATED TRACTOR, WITH FOUR EQUAL DRIVE WHEELS, EXTREMELY NARROW: IN FACT THE 5.00-15 TYRES ALLOW FOR AN OVERALL WIDTH OF ONLY 77 CM!

A key ally for working in micro-rows and narrow vineyards, in greenhouse vegetable gardens and suitable for Christmas tree nurseries typical of northern Europe.

Equipped with a 25 hp 3-cylinder Kubota engine and the same 8 FWD + 4 REV easy gear engagement transmission that equips the 35 range, CROMO 35 AR in JUNIOR MICRO version is characterised, in addition to the hyper-compact size, one-of-a-kind in the specialised tractor industry, by a basic but highly configurable set up thanks to the wide selection of optionals:

rear lift with two rams, rear control valves, height adjustable steering wheel, front work lights.

A simple and multi-functional highly specialised tractor for demanding farmers looking for manoeuvring agility in tight spaces, performance and reliability.

MOTORE

KUBOTA, 3 cilindri	
CILINDRATA	1123 cc
POTENZA	18,5 kW / 25 cv @3000 rpm

DATI TECNICI

TRASMISSIONE	Cambio 8 AV + 4 RM ad innesti agevolati
FRIZIONE	Monodisco a secco
TELAIO	Integrale oscillante OS-Frame con articolazione centrale
TRAZIONE	4WD permanenti
SOLLEVATORE POSTERIORE	Alza e abbassa, ad un cilindro esterno
CAPACITÀ SOLLEVATORE POST.	500 kg (alle rotule)
PTO POSTERIORE	540 rpm e sincronizzata
IMPIANTO IDRAULICO	A singolo circuito
FRENI DI SERVIZIO	A tamburo agenti sulle ruote posteriori
POSTAZIONE DI GUIDA	Pedanata. Leve del cambio in posizione avanzata per un accesso a bordo più agevole
SICUREZZA	Telaio di protezione posteriore omologato
PRINCIPALI OPTIONAL	Sollevatore posteriore a due cilindri (capacità sollevamento: 950 kg), fino a 2 prese idrauliche posteriori, volante di guida regolabile in altezza, fari di lavoro anteriori

ENGINE

KUBOTA, 3 cylinders	
DISPLACEMENT	*1123 cc*
POWER	*18,5 kW / 25 hp @3000 rpm*

TECHNICAL FEATURES

TRANSMISSION	*Gearbox 8 FWD + 4 REV with easy gear engagement*
CLUTCH	*Dry single disc*
CHASSIS	*Swinging integral OS-FRAME with central articulation*
DRIVE	*Permanent 4WD*
REAR LIFT	*Raising/lowering, by one external cylinder*
LIFTING CAPACITY	*500 kg (at the ball joint)*
REAR PTO	*540 rpm and synchronised*
HYDRAULIC SYSTEM	*Single-circuit*
SERVICE BRAKES	*Drum brakes acting on rear wheels*
DRIVING POSITION	*Footstep. Gearbox levers positioned under the steering wheel to allow maximum accessibility*
SAFETY	*Rear homologated roll-bar*
MAIN OPTIONS	*Rear lift with two cylinders (lifting capacity: 950 kg), up to 2 rear hydraulic outlets, height adjustable steering wheel, front work lights*

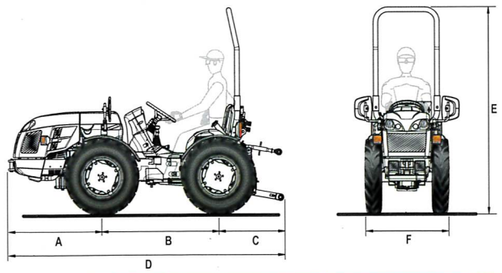

A	B	C	D	E	F	PESO *WEIGHT*
968	1200	723	2891	2022 / 2059	770 / 900	975

Dimensioni in mm (min / max) - Peso in kg
Dimensions in mm (min / max) - Weight in kg